


信 泰 電 機 有 限 公 司

SHINE TIME ELECTRICAL CO., LTD.


AH Type 電氣特性 Electrical specification

特性 Characteristics	規格值 Limits
阻值和阻值的誤差 Resistance and resistance tolerance	Resistance tolerance $\pm 1\%$ (F) $\pm 5\%$ (J) $\pm 2\%$ (G) $\pm 10\%$ (K)
溫度係數 Temperatuer coefficient	$\pm 400\text{ppm}/^\circ\text{C}$
額定負載 Power rating load	$\Delta R/R \leq \pm(1\% + 0.05\ \Omega)$
短時間過載 Short-time overload	五倍五秒 $\Delta R/R \leq \pm(0.5\% \pm 0.05\ \Omega)$
絕緣阻值 Insulation resistance	DC500V 100M Ω Min.
耐電壓 Dielectric withstanding voltage	$\Delta R/R \leq \pm(0.2\% + 0.05\ \Omega)$ AC2000V 1 minute

負載減輕曲線表 Power Derating Curve

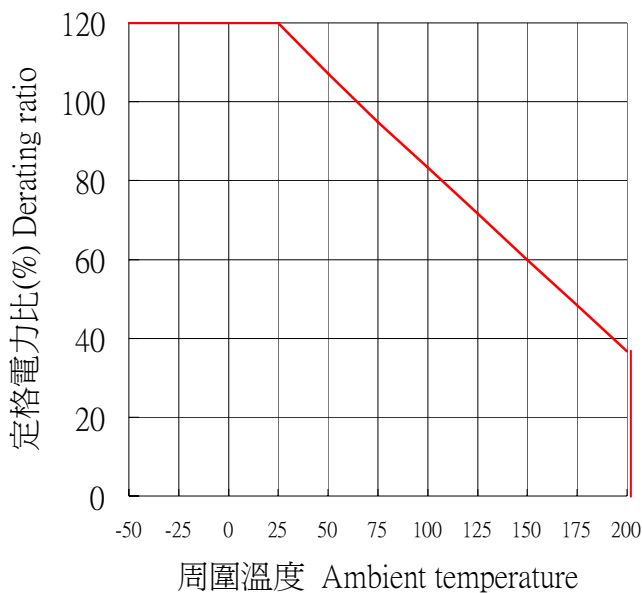

表面溫度上昇曲線圖 Temperature Rise Curve

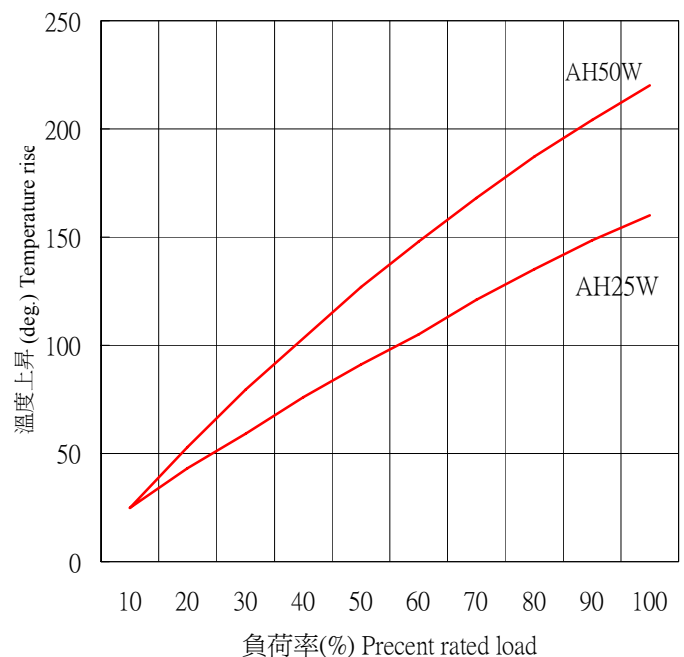

台灣工業用電阻專業製造廠
 新北市鶯歌區建國路558號

TEL : +886-2-2677-3003 FAX : +886-2-2677-1331