


信泰電機有限公司

SHINE TIME ELECTRICAL CO., LTD.


ZR Type 電氣特性 Electrical specification

特性 Characteristics	規格值 Limits
阻值和阻值的誤差 Resistance and resistance tolerance	Resistance nominal Resistance tolerance $1\Omega \leq R$ $\pm 10\%$ (K) $1\Omega > R$ $\pm 5\%$ (J)
溫度係數 Temperature coefficient	$\pm 400\text{ppm}/^\circ\text{C}$ max.
額定負載 Power rating load	$\Delta R/R \leq \pm(1\% + 0.05\Omega)$ 表面溫度上昇 (temperature) 350°C max.
短時間過載 Short-time overload	定額10倍5秒過載 1000% rated power 5 seconds $\Delta R/R \leq \pm(2\% + 0.05\Omega)$
絕緣阻值 Insulation resistance	DC500V $100\text{M}\Omega$ min.
耐電壓 Dielectric withstanding voltage	AC2000V 1 minute

負載減輕曲線圖 Power Derating Curve

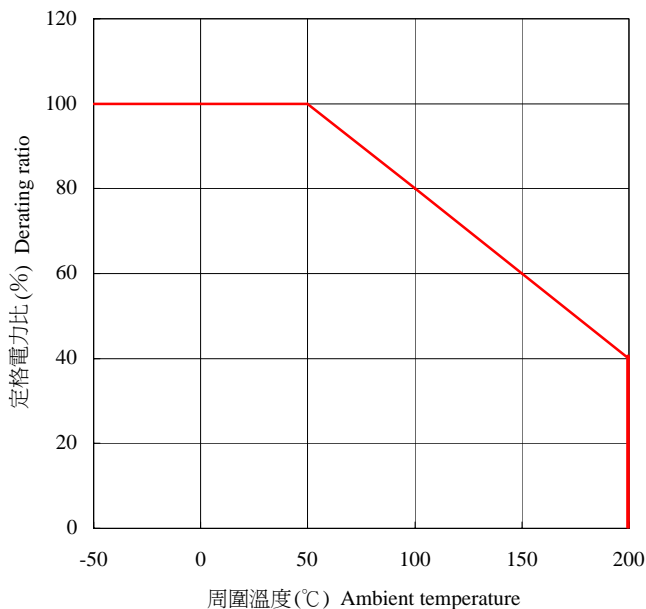

表面溫度上昇圖 Temperature Rise

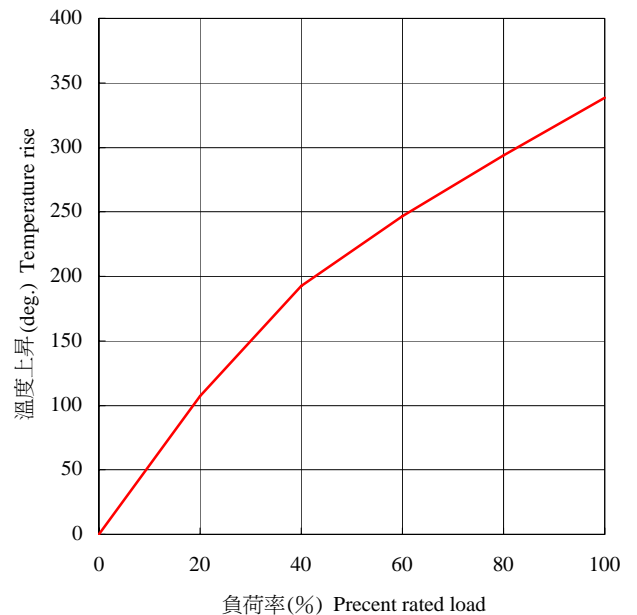

台灣最大工業用電阻專業製造廠
 新北市鶯歌區建國路558號

TEL : +886-2-2677-3003 FAX : +886-2-2677-1331