



### RATED LOAD VS. SURFACE TEMP.

額定負載與表面溫度比值

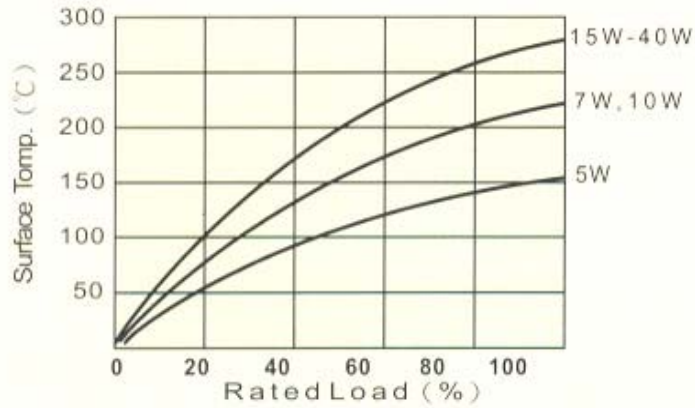

### DERATING CURVE 功率衰減曲線

定格功率負荷

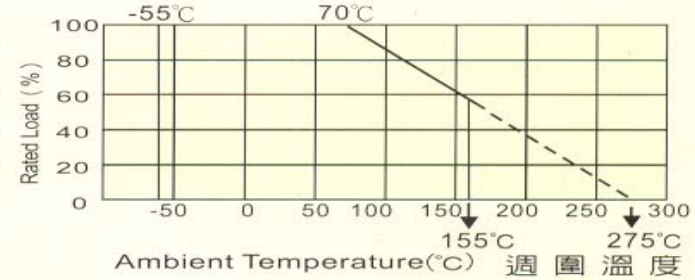

ELECTRICAL PERFORMANCE			
測試項目	Test Items	Condition	Spec.
溫度係數	Temperature Coefficient	-55~155°C	±300PPM/°C
絕緣電阻	Insulation Resistance	500V megger	1,000MΩ
負載壽命	Load Life(1,000 hours)	70°C on-off cycle 1000hrs	±5%+0.05Ω
短時間過負載	Short-time Overload	10 times of rated wattage for 5 sec.	±2%+0.05Ω
耐電壓	Dielectric Withstanding Volt	1000V AC 1min.	±1%+0.05Ω
耐濕壽命	Moisture Resistance	40°C 95%RH on-off 1000hrs	±5%+0.05Ω
耐震盪	Shock and Vibration	10 times of rated wattage for 5 min.	±2%+0.05Ω
耐衝擊	Soldering Heat	-30°C~85°C for 5 cycles	±1%+0.05Ω
不燃性	Incombustibility	16 times of rated wattage for 5min.	not flamed
注意事項	最大過載電壓為最大工作電壓之二倍		
NOTE	Max Overload Voltage is 2 times of Max Working Voltage		